

Report No.: 18360BC30039801

APPLICATION FOR IEC TEST REPORT

Client Name : Huizhou Epever Technology Co., Ltd.

Address : No.103, Dongxing Rd, Chenjiang Street,
Zhongkai High-Tech Zone, Huizhou, China

Product Name : Lithium Battery

Date : Sept. 14, 2023

Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an
District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066126 Fax: (86) 0755-26066021 Email: service@anbotech.com

Code: AB-AB-113-b



Hotline
400-003-0500
www.anbotech.com.cn



TEST REPORT IEC 62133-2:2017+A1:2021 Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems	
Report Reference No. : 18360BC30039801 Compiled by (+ signature) : Shelly Mo / Project Engineer <i>Shelly Mo</i> Approved by (+ signature) : Dely Yang / Project Engineer <i>Dely Yang</i> Date of issue : Sept. 14, 2023 Contents : 26 pages (including 2 pages of photos)	
Testing laboratory Name : Shenzhen Anbotech Compliance Laboratory Limited Address : East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Testing location : Shenzhen Anbotech Compliance Laboratory Limited	
Client Name : Huizhou Epever Technology Co., Ltd. Address : No.103, Dongxing Rd, Chenjiang Street, Zhongkai High-Tech Zone, Huizhou, China	
Test specification Standard : IEC 62133-2:2017+A1:2021 Test procedure : Test report Non-standard test method : N.A.	
Test item Description : Lithium Battery Trademark : Epever Model and/or type reference : LFP2.56KWH25.6V-P20L1 Manufacturer : Same as client Address : Same as client Factory : Same as client Address : Same as client Rating(s) : 25.6V, 100Ah, 2560Wh	



Particulars: test item vs. test requirements

Ambient temperature.....: 20°C ± 5°C.

Test case verdicts

Test case does not apply to the test object: N (.A.)

Test item does meet the requirement: P (ass)

Test item does not meet the requirement: F (ail)

Testing

Date of receipt of test item: Aug. 23, 2023

Date(s) of performance of test.....: Aug. 23, 2023 to Sept. 05, 2023

Tests performed (name of test and test clause):

cl.5.6.2 Design recommendation;
cl.7.1 Charging procedure for test purposes (for cells and batteries);
cl.7.2.1 Continuous charging at constant voltage (cells);
cl.7.2.2 Case stress at high ambient temperature (battery);
cl.7.3.1 External short circuit (cells);
cl.7.3.2 External short circuit (batteries);
cl.7.3.3 Free fall (cells and batteries);
cl.7.3.4 Thermal abuse (cells);
cl.7.3.5 Crush (cells);
cl.7.3.6 Over-charging of battery;
cl.7.3.7 Forced discharge (cells);
cl.7.3.8 Mechanical tests (batteries);
cl.7.3.9 Design evaluation – Forced internal short circuit (cells);
cl.8.2 Small cell and battery safety information.

General remarks

This test report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report are only relevant to the test sample.

"(see remark #)" refers to a remark appended to the report.


"(see appended table)" refers to a table appended to the report

Throughout this report a dot is used as the decimal separator.

The product fulfils the requirements of EN 62133-2:2017+A1:2021




Construction:

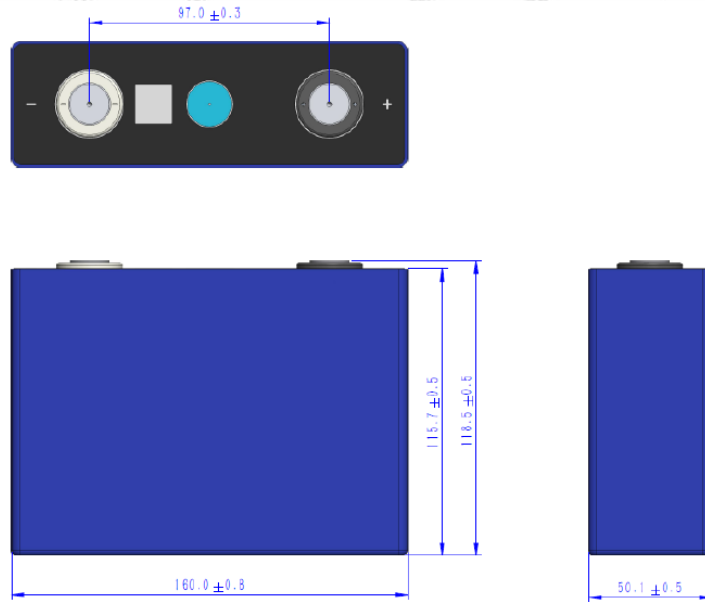

Cell (Unit: mm)

Circuit diagram:

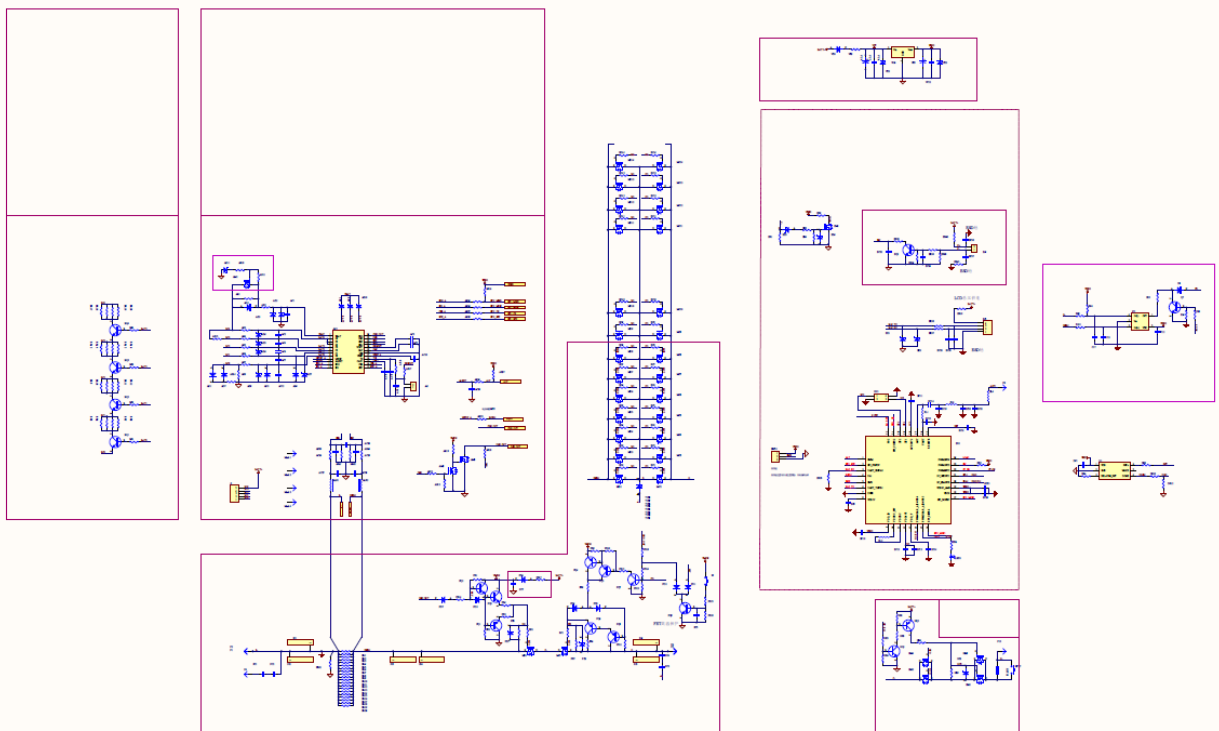

Copy of marking plate:

The artwork below may be only a draft.

Lithium Battery	8IFpP51/119/161
LFP2.56KWH25.6V-P20L1	
25.6V, 100Ah, 2560Wh	
(+), (-)	
Huizhou Epever Technology Co., Ltd.	
2023.08	
CAUTION	
-Do not disassemble or modify	
-Do not short-circuit	
-Do not dispose in fire	
-Do not expose to high temperature	



General product information and other remarks:

This battery is constructed with eight lithium-ion cells (8S1P), and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Final Voltage
LFP2.56KWH 25.6V-P20L1	100Ah	25.6V	50A	100A	50A	100A	29.2V	20V

The main features of the cell in the battery are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Final Voltage
LF100LA	102Ah	3.2V	20.4A	20.4A	102A	102A	3.65V	2.5V

The main features of the cell in the battery are shown as below (clause 7.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
LF100LA	3.65V	5.1A	0°C	65°C



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N
	Insulation resistance (MΩ)		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the top of cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the user manual.	P
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance	DC connector complied with the requirements.	P
	Terminal contacts are arranged to minimize the risk of short-circuit		P
5.6	Assembly of cells into batteries		P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	Protective circuit equipped on battery.	P
	This protection may be provided external to the battery such as within the charger or the end devices		N
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions	8S1P	P
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly	Current, voltage and temperature limits specified by cell manufacturer.	P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N
	Protective circuit components added as appropriate and consideration given to the end-device application		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance	Safety analysis report provided by the manufacturer.	P
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks	Charging cell voltage of each cell: 3.65V, not exceed 3.65V specified in Table 2.	P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		P
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage	Final voltage of battery per cell: 2.5V, not exceed the final voltage specified by cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product		P
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		P
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery		P
5.8	Battery safety components		N
	According annex F		N

6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1	Not coin cells	N
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C $\pm$ 5 °C		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	P
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes	Lithium system.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20°C ± 5°C, using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at 20°C ± 5°C at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5 and 7.3.9		P
	After stabilization for 1h to 4h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method	Charge temperature specified by manufacturer: 0-65°C.	P
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)	Test complied.	P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7days with 20400mA and 3.65V.	P
	Results: No fire. No explosion. No leakage.....	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)	Test complied.	P
	Oven temperature (°C).....	70°C	—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery casing.	P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: No fire. No explosion	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)	Tested complied.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		P
	- The case temperature declined by 20 % of the maximum temperature rise		N
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Single fault conducted on two samples.	P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies on MOSFET (MD1) see appended table 7.3.2.	P
	Results: No fire. No explosion	(See appended table 7.3.2)	P
7.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion	No fire. No explosion	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C).....	130°C	—
	Results: No fire. No explosion	No fire. No explosion	P
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N
	Results: No fire. No explosion	(See appended Table 7.3.5)	P
7.3.6	Over-charging of battery	Tested complied.	P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and	35.04V applied.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10°C change in 30-minute period); or		N
	- Returned to ambient		P
	Results: No fire. No explosion	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)	Tested complied.	P
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		P
	Results: No fire. No explosion	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration	Tested complied.	P
	Results: No fire, no explosion, no rupture, no leakage or venting.	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock	Tested complied.	P
	Results: No leakage, no venting, no rupture, no explosion and no fire	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for.....	For France, Japan, Republic of Korea and Switzerland.	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N for prismatic cells.	P
	Results: No fire	(See appended table 7.3.9)	P
8	INFORMATION FOR SAFETY		P
8.1	General		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products		P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users		P
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N
8.2	Small cell and battery safety information	Not small cell and battery.	N
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N
9	MARKING		P
9.1	Cell marking		N
	Cells marked as specified in IEC 61960, except coin cells	The final product is battery.	N
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N
9.2	Battery marking		P
	Batteries are marked as specified in IEC 61960, except for coin batteries	The battery is marked in accordance with IEC 61960, also see page 5.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity		N
	Batteries are marked with an appropriate caution statement		P
	- Terminals have clear polarity marking on the external surface of the battery, or		P
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		P
9.3	Caution for ingestion of small cells and batteries	Not small cell and battery.	N
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2		N
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package		N
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P
	- Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P

10	PACKAGING AND TRANSPORT		N
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N

ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 3.65V	P
A.3.2	Upper limit charging voltage	3.65V	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	3.65V applied.	N
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-65°C	P
A.4.3	High temperature range	Charging high temperature declared by client is: 65°C	P
A.4.3.1	General		P
A.4.3.2	Explanation of safety viewpoint		P
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		P
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range	70°C applied	P
A.4.4	Low temperature range	Charging low temperature declared by client is: 0°C	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	-5°C applied	P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint	Cell specified final voltage 2.5V.	P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P
A.5.1	General		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		N
A.5.5.1	Insertion of nickel particle in winding core		N
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N
A.5.6	Insertion of nickel particle in prismatic cell		P
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		N
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N
D.1	General		N
D.2	Method		N
	A sample size of three coin cells is required for this measurement		N



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N
	Coin cells with an internal resistance greater than 3 Ω require no further testing		N
ANNEX E	PACKAGING AND TRANSPORT		N
ANNEX F	COMPONENT STANDARDS REFERENCES		N



7.2.1	TABLE: Continuous charging at constant voltage (cells)			P
Sample No.	Recommended charging voltage V_c , (Vdc)	Recommended charging current I_{rec} , (mA)	OCV at start of test, (Vdc)	Results
C1	3.65	20400	3.57	P
C2	3.65	20400	3.58	P
C3	3.65	20400	3.57	P
C4	3.65	20400	3.57	P
C5	3.65	20400	3.58	P
Supplementary information: - No fire or explosion - No leakage - Others (please explain)				

7.2.2	TABLE: Moulded case stress at high ambient temperature (battery)		P
Sample No.	OCV at start of test, (Vdc)	OCV at start of test, (Vdc)	Results
B1	27.33	27.33	P
B2	27.32	27.32	P
B3	27.32	27.32	P
Supplementary information			

7.3.1	TABLE: External short circuit (cell)				P
Sample No.	Ambient T(°C)	OCV before test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature (°C)	Results
Charging temperature: 70°C					
C6	55.5	3.41	80.4	83.0	P
C7	55.5	3.42	86.0	80.9	P
C8	55.5	3.42	87.0	84.7	P
C9	55.5	3.42	82.2	79.8	P
C10	55.5	3.42	82.6	83.4	P
Charging temperature: -5°C					
C11	55.3	3.34	81.8	83.5	P
C12	55.3	3.34	84.1	86.3	P
C13	55.3	3.35	79.1	85.5	P
C14	55.3	3.35	80.8	82.8	P
C15	55.3	3.33	82.2	86.9	P



Supplementary information:

- No fire or explosion
- Others (please explain)

7.3.2	TABLE: External short-circuit (battery)					P
Sample No.	Ambient T, (°C)	OCV before test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature, (°C)	Component single fault condition	Results
B4	22.6	27.31	79.8	22.8	-	P
B5	22.6	27.31	80.4	22.9	-	P
B6	22.6	27.32	86.8	22.9	-	P
B7	22.7	27.32	85.9	58.9	S-C MOS (MD1)	P
B8	22.7	27.32	84.5	63.1	S-C MOS (MD1)	P

Supplementary information:

- No fire or explosion
- Others (please explain)
- S-C: short-circuited

7.3.3	TABLE: Free fall		P
Sample No.	OCV at start of test, (Vdc)	OCV at end of test, (Vdc)	Results
C16	3.41	3.41	P
C17	3.41	3.41	P
C18	3.41	3.41	P
B9	27.31	27.31	P
B10	27.32	27.32	P
B11	27.32	27.32	P

Supplementary information:

- No fire or explosion
- Others (please explain)

7.3.4	TABLE: Thermal abuse (cells)			P
Sample No.	OCV at start of test, (Vdc)	Ambient T(°C)	Temperature raised at a rate, (°C)	Results
Charging temperature: 70°C				
C19	3.42	130±2	5°C/min	P
C20	3.42	130±2	5°C/min	P
C21	3.43	130±2	5°C/min	P
C22	3.42	130±2	5°C/min	P



C23	3.42	130±2	5°C/min	P
Charging temperature: -5°C				
C24	3.34	130±2	5°C/min	P
C25	3.35	130±2	5°C/min	P
C26	3.34	130±2	5°C/min	P
C27	3.34	130±2	5°C/min	P
C28	3.33	130±2	5°C/min	P
Supplementary information: - No fire or explosion - Others (please explain)				

7.3.5	TABLE: Crush (cells)			P
Sample No.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results
Charging temperature: 70°C				
C29	3.42	3.42	13.0	P
C30	3.42	3.41	13.0	P
C31	3.41	3.41	12.9	P
C32	3.42	3.42	13.0	P
C33	3.42	3.42	13.0	P
Charging temperature: -5°C				
C34	3.33	3.31	13.0	P
C35	3.33	3.33	13.0	P
C36	3.35	3.35	13.0	P
C37	3.34	3.34	13.0	P
C38	3.33	3.32	13.1	P
Supplementary information: - No fire or explosion - Others (please explain)				

7.3.6	TABLE: Over-charging of battery			P
Constant charging current (A)		200	—	
Supply voltage (Vdc)		35.04	—	
Sample No.	OCV before charging, (Vdc)	Total charging time, (minute)	Maximum outer case temperature, (°C)	Results
B12	23.44	60	23.2	P
B13	23.46	60	23.5	P



B14	23.45	60	23.3	P
B15	23.47	60	23.3	P
B16	23.46	60	23.4	P
Supplementary information: - No fire or explosion - Others (please explain)				

7.3.7	TABLE: Forced discharge (cells)			P
Sample No.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_t (A)	Lower limit discharge voltage (Vdc)	Results
C39	2.93	102	2.5	P
C40	2.92	102	2.5	P
C41	2.93	102	2.5	P
C42	2.93	102	2.5	P
C43	2.93	102	2.5	P
Supplementary information: - No fire or explosion - Others (please explain)				

7.3.8.1	TABLE: Vibration				P
Sample No.	OCV before test, (Vdc)	OCV after test, (Vdc)	Mass before test, (kg)	Mass after test, (kg)	Results
B17	27.33	27.33	21.305	21.305	P
B18	27.31	27.31	21.309	21.309	P
B19	27.32	27.32	21.301	21.301	P
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting - Others (please explain)					

7.3.8.2	TABLE: Mechanical shock				P
Sample No.	OCV before test, (Vdc)	OCV after test, (Vdc)	Mass before test, (kg)	Mass after test, (kg)	Results
B20	27.32	27.32	21.312	21.312	P
B21	27.31	27.31	21.315	21.315	P
B22	27.31	27.31	21.323	21.323	P



Supplementary information:

- No fire or explosion
- No rupture
- No leakage
- No venting

7.3.9	TABLE: Forced internal short circuit (cells)				P
Sample No.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results
Charging temperature: 70°C					
C44	70	3.41	1	400	P
C45	70	3.42	1	400	P
C46	70	3.42	1	400	P
C47	70	3.42	1	400	P
C48	70	3.42	1	400	P
Charging temperature: -5°C					
C49	-5	3.34	1	400	P
C50	-5	3.32	1	400	P
C51	-5	3.33	1	400	P
C52	-5	3.32	1	400	P
C53	-5	3.35	1	400	P
Supplementary information: ¹⁾ Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. - No fire or explosion - Others (please explain)					

D.2	TABLE: Internal AC resistance for coin cells			N
Sample No.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
Supplementary information: ¹⁾ Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables				



TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Cell	EVE Power CO., LTD	LF100LA	3.2V, 102Ah	IEC 62133-2:2017+A1:2021	Test with appliance
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					



Photo 1

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal



Photo 2

- ☐ front
☒ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal

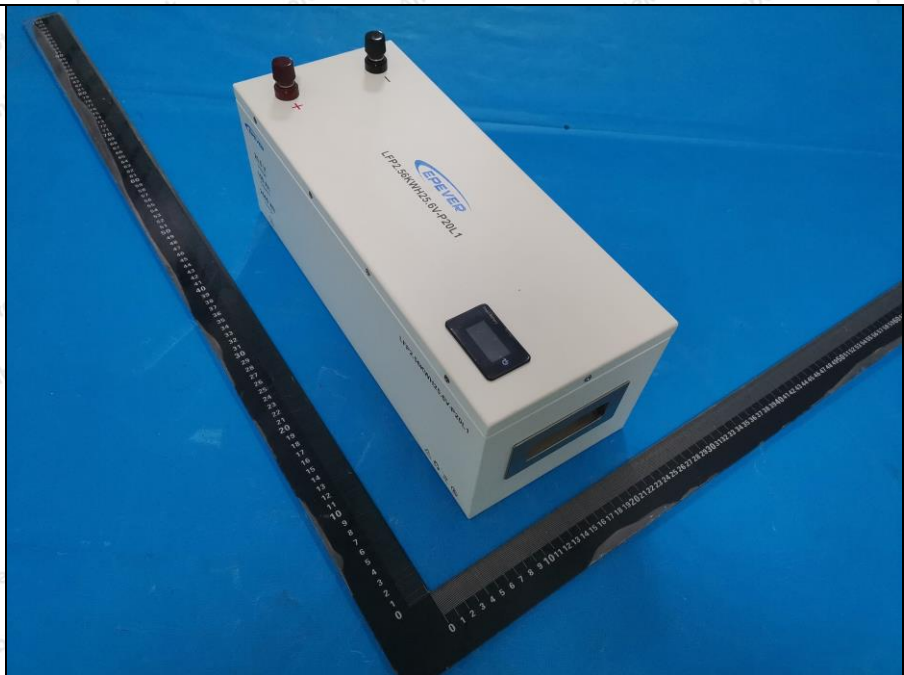


Photo 3

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal


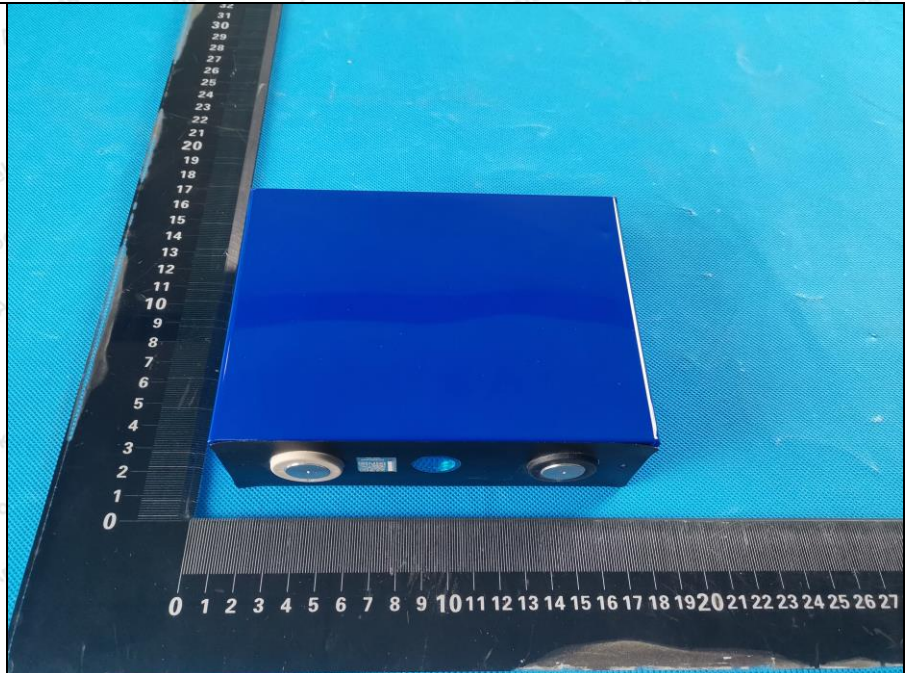


Photo 4

- ☐ front
☒ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal



End of the report

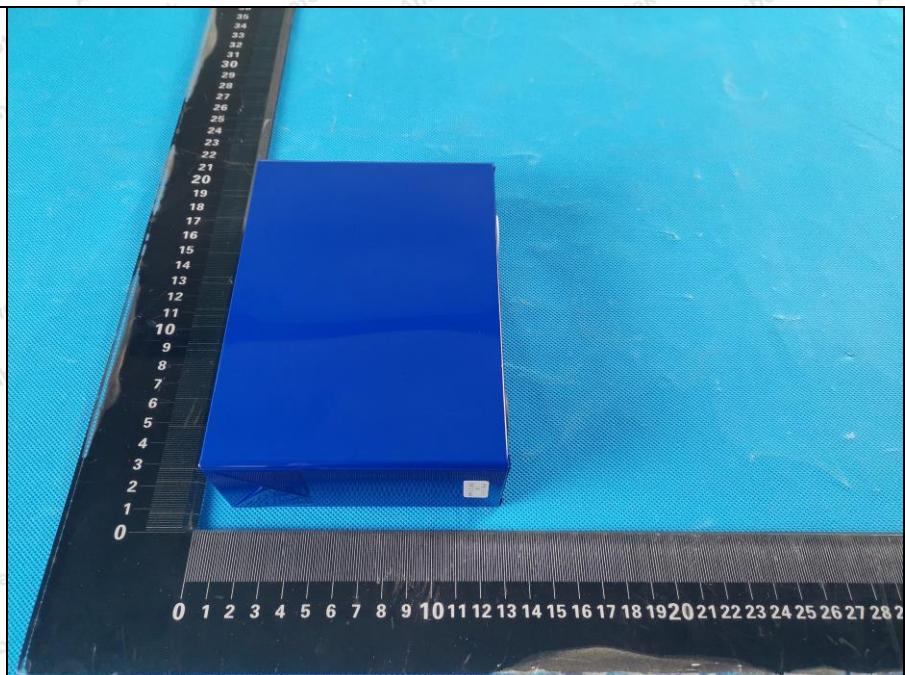